


TIMELOCK MOUNTING PRINCIPLE

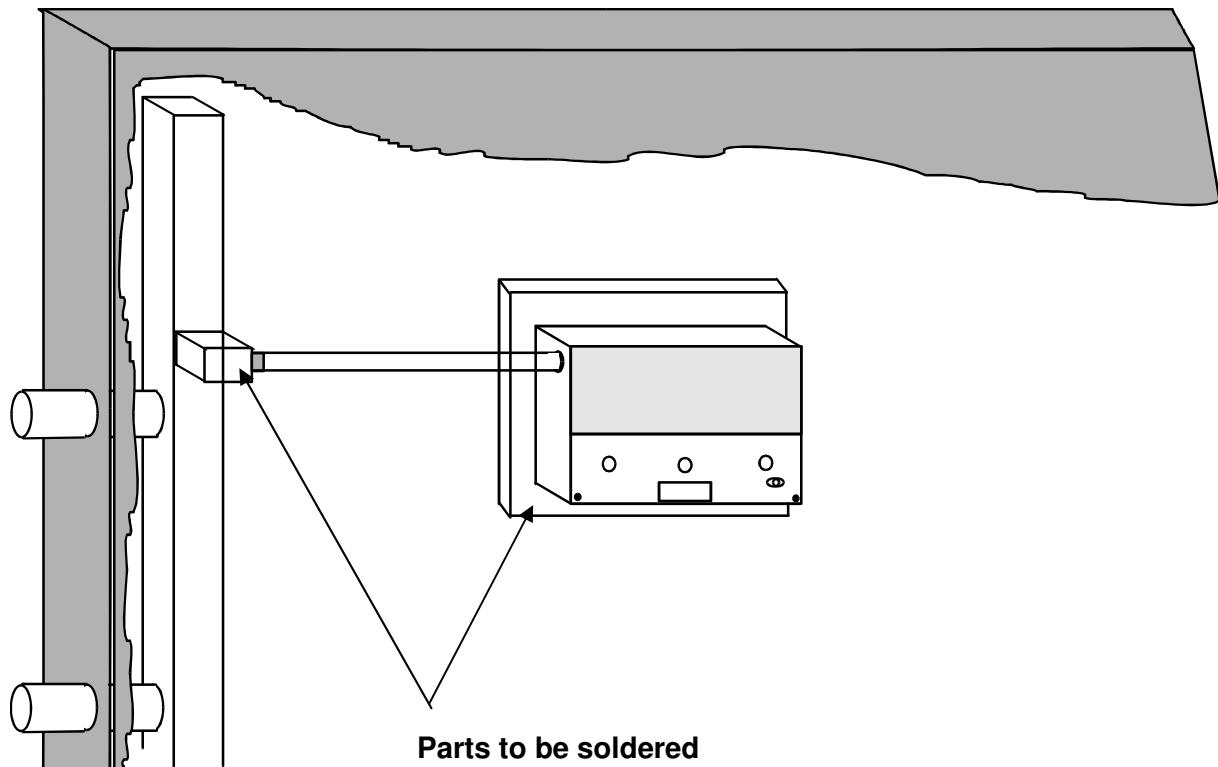

- Carefully check the coupling between the bar and the sliding lever inside the Timelock. Adjust the length of the bar with the nut (cut it, if it is definitely too long).

Keep a play of about **5 mm** between the bar and the lever.

If the bar touches the lever in locked position, the Timelock may not open.

Note: The bar and the mounting plate are available from the supplier as spare components.